

ISUZU

ELF



SAFETY PLUS

SRS
AIRBAG

ASR
ANTI-SLIP REGULATOR

ABS
ANTI-LOCK BRAKING SYSTEM

EBO
ELECTRONIC BRAKE FORCE DISTRIBUTION

4X2 RIGID

GVW 4,100kg

GVW 5,500kg

GVW 7,500kg

NLR
CREW

NMR
CREW

NPR
CREW



SPECIFICATIONS

NLR CREW

NMR CREW

NPR CREW

MODEL CODE	NLR77UFEW / UHEW		NMR77UFHW		NPR75UKHW	
Drive System	4x2					
ENGINE						
Model	4JH1-TC			4HK1-TC		
Type	4-Cylinder In-line, 4 Cycle Water-Cooled					
	OHV, Turbo with Intercooler			OHC, Turbo with Intercooler		
Displacement	cc	2,999		5,193		
Maximum Output (Gross)	kW (PS) @ rpm	81 (110)@3,200		110 (150)@2,600		
Maximum Torque	Nm(kgfm)@rpm	230 (23.5)@1,400-3,200		404 (41)@1,600-2,600		
Emission Level	Euro 2					
Fuel System	Commonrail Direct Injection					
TRANSMISSION						
Model / No. of Speed	MSB-5S / Manual 5-Speed			MY-6S / Manual 6-Speed		
Gear Ratio	1st	5.016		5.979		
	2nd	2.672		3.434		
	3rd	1.585		1.862		
	4th	1.000		1.297		
	5th	0.770		1.000		
	6th	-		0.759		
	Reverse	4.783		5.701		
	Final	5.857		5.125		
WEIGHT & CAPACITIES						
Gross Vehicle Weight	kg	4,100	5,500	7,500		
Curb Weight	kg	2,045 / 2,070	2,155	2,750		
Front	kg	1,380 / 1,385	1,415	1,795		
Rear	kg	685 / 685	740	955		
Fuel Tank Capacity	l	63 / 75	63	100		
AXLE						
Front	Type	Reverse Elliot, I-Beam				
Front Axle Capacity (Design)	kg	2,900		3,100		
Rear	Type	Banjo, Full Floating				
Rear Axle Capacity (Design)	kg	3,600		6,000		
SUSPENSION SYSTEM						
Suspension	Front	Semi Elliptical Alloy Steel Leaf Spring with Double Acting Telescopic Shock Absorber, Stabiliser Bar		Semi Elliptical Alloy Steel Leaf Spring with Double Acting Telescopic Shock Absorber		
	Rear	Semi Elliptical Alloy Steel Leaf Spring with Double Acting Telescopic Shock Absorber				
TYRES & WHEELS						
Tyres		205 / 85R16		215 / 75R17.5		
Wheels		16 x 5.5J-85		17.5 x 6.00-127		
BRAKES						
Service	Type	Hydraulic system with auto adjusting front and rear drum brakes				
		Dual circuit, vacuum assistance and Anti-Lock Brake System (ABS) with Electronic Brake force Distribution (EBD)		Drum Brakes with Vacuum Assistance and Load Sensing Proportioning Valve (LSPV)		Dual circuit, vacuum assistance and Anti-Lock Brake System (ABS) with Electronic Brake force Distribution (EBD)
Parking Brake Type		Transmission Mounted, Mechanical Operated Internal Expanding				
Auxiliary		Exhaust Brake				
STEERING						
Steering System		Power Assist, Recirculating Ball Type				
Min. Turning Radius	m	6.0 / 7.1		6.0		7.1
ELECTRICAL						
Battery		12V x 2				
Alternator		12V - 60A		24V-90A		
OTHER SAFETY						
Supplemental Restraint System (SRS)		Equipped with Pre-tensioner Seatbelt				
Anti-Slip Regulator (ASR)		Equipped with on/off function				
DIMENSION						
Overall Length	mm	5,250 / 6,025		5,250		6,635
Overall Width	mm	1,815		1,860		2,125
Overall Height	mm	2,172 / 2,175		2,290		2,275
Wheelbase	mm	2,750 / 3,345		2,750		3,815
Front Overhang	mm	1,110		1,110		1,110
Rear Overhang	mm	1,390 / 1,570		1,390		1,710
Front Tread	mm	1,475		1,475		1,680
Rear Tread	mm	1,395		1,425		1,650
Cab to Axle	mm	1,186 / 1,781		1,186		2,251

TESTED AND PROVEN POWERTRAIN




NLR CREW | NMR CREW

4JH1-TC

Displacement: **2,999cc**
 Max. Output (Gross): **110ps (81kW) @3,200rpm**
 Max. Torque: **230Nm @1,400 - 3,200rpm**

110PS MAX. POWER
230Nm FLAT TORQUE




NPR CREW

4HK1-TC

Displacement: **5,193cc**
 Max. Output (Gross): **150ps (110kW) @2,600rpm**
 Max. Torque: **404Nm @1,600-2,600rpm**

150PS MAX. POWER
404Nm FLAT TORQUE



CLASS-LEADING SAFETY AND LONG TERM COST SAVINGS



ASR traction control helps prevent wheelspins and improves vehicle stability when driving on slippery roads.


EBD is a function that uses the ABS to distribute braking force between the front and rear wheels to compensate for changes in the load conditions or any shift of load due to acceleration/deceleration, thus preventing premature locking of the rear wheels.

**Only available on NLR CREW & NPR CREW Models only.*



*SRS airbag system and seat belt with pre-tensioner are activated in the event of a frontal collision, mitigating impact to the head and chest.

**Applicable for driver only.*

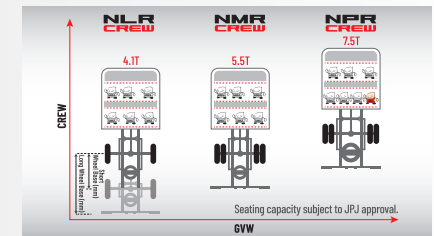

ELF Crew seating capacity and GVW chart.

Dealer's information



ISUZU MALAYSIA SDN BHD 200401026438 (664846-H)

501D, LEVEL 5, TOWER D, UPTOWN 5, NO.5, JALAN SS21/39,
 DAMANSARA UPTOWN, 47400 PETALING JAYA, SELANGOR DARUL EHSAN.
 GENERAL LINE: 03-7723 9777 FAX: 03-7723 9779
 HOTLINE: 1-300-88-1133 www.isuzu.net.my

IsuzuTrucksMalaysia

ISUZU SERVICE CENTRE SDN BHD 201601034731 (1205672-X)

LOT 730, JALAN SG. RASA, SECTION 17,
 40000 SHAH ALAM, SELANGOR DARUL EHSAN.
 PHONE: 03-5513 0518
 FAX: 03-5512 7550

ISUZU
GENUINE PARTS

ISUZU
BEST VALUE PARTS