

ISUZU

FORWARD



4x2 RIGID

GVW 11,900kg

GVW 16,000kg

**FSR
PRO**

**FVR
PRO**




SPECIFICATIONS

FSR PRO

FVR PRO

MODEL CODE	FSR90SU-NC	FVR90SU-SD
Drive System	4 x 2	
ENGINE		
Model	4HK1-TCS	
Type	4-Cylinder In-line, 4 Cycle, Water-Cooled, OHC, Turbocharger with Intercooler	
Displacement	cc 5,193	
Bore x Stroke	mm 115 x 125	
Maximum Output	kW (PS)@rpm 154 (210) @ 2,600	
Maximum Torque	Nm (kgm)@rpm 637 (65) @ 1,600 706 (72) @ 1,600	
Emission Level	Euro 2	
Fuel System	Common Rail Direct Injection	
TRANSMISSION		
Model / No. of Speed	ISUZU MZW6P / 6-Speed Manual	
Gear Ratio	1st 6.615 2nd 4.095 3rd 2.358 4th 1.531 5th 1.000 6th 0.722 Reverse 6.615	
Final	5.571	6.833
WEIGHT & CAPACITIES		
Gross Vehicle Weight	kg 11,900	16,000
Curb Weight	kg 3,699	5,156
Front	kg 2,242	3,100
Rear	kg 1,457	2,056
Fuel Tank Capacity	l 200	
AXLE		
Front	Type Reverse Elliot; I Beam	
Front Axle Capacity (Design)	kg 4,100	6,000
Rear	Type Single Reduction Banjo Design, Full Floating	
Rear Axle Capacity (Design)	kg 7,800	10,500
SUSPENSION SYSTEM		
Suspension	Front Semi Elliptical Alloy Steel Leaf Springs, Hydraulic Double Acting Telescopic Shock Absorber	
	Rear Semi Elliptical Alloy Steel Leaf Springs	
TYRES & WHEELS		
Tyres	9R22.5	11R22.5
Wheels	22.5 x 6.75	22.5 x 8.25 (ISO 10 Studs)
BRAKES		
Service	Air Over Hydraulic (AOH), Dual Circuit, Front & Rear Leading Trailing	
Parking Brake Type	Mechanical Expansion Type, Located At The Rear End Of Transmission	
Auxiliary	Exhaust Brake	
STEERING		
Steering System	Power assisted, Hydraulic Integral, Recirculating Ball, Energy absorbing, Tilt & Telescopic Column	
Min. Turning Radius	m 8.29	10.3
ELECTRICAL		
Battery	12V x 2	
Alternator	24V-50A	
DIMENSION		
Overall Length	OAL mm 8,315	10,225
Overall Width	OAW mm 2,200	2,400
Overall Height	OAH mm 2,680	2,805
Wheelbase	WB mm 4,770	6,050
Front Overhang	FOH mm 1,255	1,440
Rear Overhang	ROH mm 2,290	2,735
Front Tread	AW mm 1,795	1,970
Rear Tread	CW mm 1,700	1,850

TESTED AND PROVEN POWERTRAIN



FVR PRO 4HK1-TCS

Displacement: **5,193cc**
Max. Output (Gross): **210ps @ 2,600rpm**
Max. Torque: **706Nm (72kgm) @ 1,600rpm**

210PS MAX POWER
706Nm MAX TORQUE




FSR PRO 4HK1-TCS


Displacement: **5,193cc**
Max. Output (Gross): **210ps @ 2,600rpm**
Max. Torque: **637Nm (65kgm) @ 1,600rpm**

210PS MAX POWER
637Nm MAX TORQUE

*Deeper final ratio 6.833 for better torque startability.

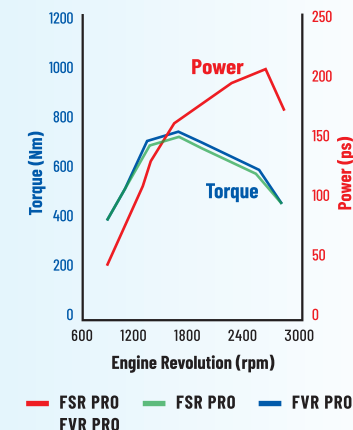


CLASS-LEADING SAFETY AND LONG TERM COST SAVINGS

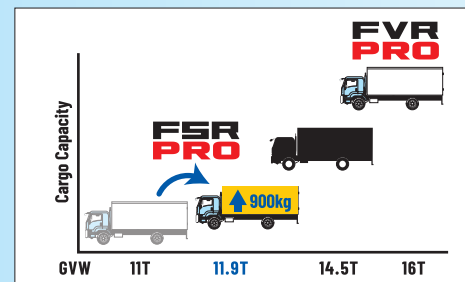

Versatile FSR PRO and FVR PRO series cater to a variety of business needs from the 11T to the 16T categories.




New digital meter with enhanced visibility on important information.



Small turning radius for easy maneuvering in congested and tight areas. ** Applicable for FSR90SU-NC only



*Sturdier leaf spring for better driving comfort with heavy loads, and with less deflection.

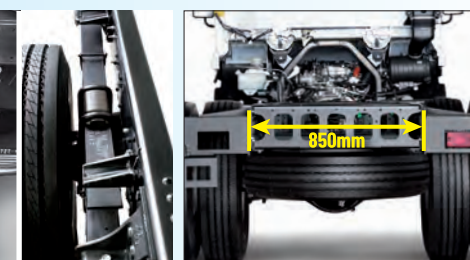

*Wide chassis frame 850mm.

*Applicable for FVR90SU-SD only.

Dealer's information

ISUZU

ISUZU MALAYSIA SDN BHD 200401026438 (664946-H)

501D, LEVEL 5, TOWER D, UPTOWN 5, NO.5, JALAN SS21/39, DAMANSARA UPTOWN, 47400 PETALING JAYA, SELANGOR DARUL EHSAN.
GENERAL LINE: 03-7723 9777 FAX: 03-7723 9779
HOTLINE: 1-300-88-1133 www.isuzu.net.my

IsuzuTrucksMalaysia

ISUZU SERVICE CENTRE SDN BHD 201601034731 (1205672-X)

LOT 730, JALAN SG. RASA, SECTION 17, 40000 SHAH ALAM, SELANGOR DARUL EHSAN.
PHONE: 03-5513 0518
FAX: 03-5512 7550

ISUZU
GENUINE PARTS

ISUZU
BEST VALUE PARTS