

# ISUZU

# FORWARD



**6 x 2 RIGID**  
GVW 26,000kg

**FVR**  
**300**  
6X2

EURO **E3**

**B20**  
DIESEL  
COMPATIBLE

**ABS**

**FREE**  
**SERVICE CAMPAIGN**  
 **UP TO 100,000km\***  
\*Terms and Conditions apply.  
**ISUZU**

**3**  
YEARS WARRANTY  
OR  
**200,000km**  
WHICHEVER  
COMES FIRST

**ISUZU**  
**DOCTOR**  
**MOBILE**  
**24**  
HOUR ASSISTANCE

Reliable support with  
round-the-clock  
business operation.



1-800-88-8000

## SPECIFICATIONS

## FVR300 6X2

Model Code	FVR34UU-ST2 UBS (6x2)	
Drive Train	6 x 2	
Engine		
Model	6HK1-TCS	
Type	6-Cylinder In-line, 4 Cycle, Water-Cooled OHC, Turbocharger with Intercooler	
Displacement	cc	7,790
Bore x Stroke	mm	115 x 125
Compression Ratio		17.5 : 1
Maximum Output	kW (PS)@rpm	221 (300) @ 2,400
Maximum Torque	Nm (kgm)@rpm	986 (100) @ 1,450
Emission Level		Euro 3
Fuel System	Common Rail Direct Injection	
TRANSMISSION		
Model / No. of Speed	EATON ES11109 / 9-Speed Manual	
Gear Ratio	C	12.638
	1st	8.807
	2nd	6.550
	3rd	4.768
	4th	3.548
	5th	2.482
	6th	1.846
	7th	1.344
	8th	1.000
	Reverse	13.210
	Final	4.556
WEIGHT & CAPACITIES		
Gross Vehicle Weight	kg	26,000
Curb Weight	kg	6,755
Front	kg	3,339
Rear	kg	3,416
Fuel Tank Capacity	l	400
AXLE		
Front	Type	Reverse Elliot: I Beam
Front Axle Capacity (Design)	kg	7,500
Rear	Type	Single Reduction Banjo Design, Full Floating
Rear Axle Capacity (Design)	kg	19,000
SUSPENSION SYSTEM		
Suspension	Front	Semi Elliptical Alloy Steel Leaf Springs, Hydraulic Double Acting Telescopic Shock Absorber
	Rear	Semi Elliptical Alloy Steel Leaf Springs
	Rear 2	Hendrickson TOUGHLIFT® FM lift axles suspension system
TYRES & WHEELS		
Tyres	295/80R 22.5	
Wheels	22.5 x 8.25 (ISO 10 Studs)	
BRAKES		
Service	Full Air with Anti-Lock Braking System (ABS), Auto Adjuster	
Parking Brake Type	Spring Acting, Rear Wheel Parking	
Auxiliary	Exhaust Brake	
STEERING		
Steering System	Power assisted, Hydraulic Integral, Recirculating Ball, Energy absorbing, Tilt & Telescopic Column	
Min. Turning Radius	m	12.15
ELECTRICAL		
Battery	12V x 2	
Alternator	24V - 60A	
AXLE		
Overall Length	OAL - mm	11,625
Overall Width	OAW - mm	2,490
Overall Height	OAH - mm	2,900
Wheelbase	WB - mm	6,160 + 1,510
Front Overhang	FOH - mm	1,255
Rear Overhang	ROH - mm	2,700
Front Tread	AW - mm	2,065
Rear Tread	CW - mm	1,850

**ISUZU**

ISUZU MALAYSIA SDN BHD 200401026438 (664946-H)

501D, LEVEL 5, TOWER D, UPTOWN 5, NO.5, JALAN SS21/39,  
DAMANSARA UPTOWN, 47400 PETALING JAYA, SELANGOR DARUL EHSAN.  
GENERAL LINE: 03-7723 9777 FAX: 03-7723 9779  
HOTLINE: 1-300-88-1133 www.isuzu.net.my

 IsuzuTrucksMalaysia

ISUZU SERVICE CENTRE SDN BHD 201601034731 (1205672-X)

LOT 730, JALAN SG. RASA, SECTION 17,  
40000 SHAH ALAM, SELANGOR DARUL EHSAN.  
PHONE: 03-5513 0518  
FAX: 03-5512 7550

## PERFORMANCE



### FVR 300 6HK1-TCS

Displacement: **7,790cc**  
Max. Output (Gross): **300ps @ 2,400rpm**  
Max. Torque: **986Nm (100kgm) @ 1,450rpm**


**300PS**  
Max Power

**986Nm**  
Max Torque

**EURO 3**



Eaton ES1109 /  
9-Speed Transmission.

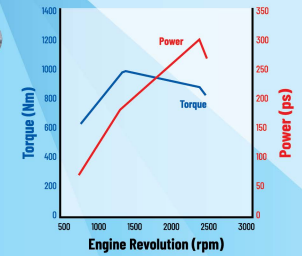

## USEFUL FEATURES



Rivetless wider chassis for greater ease of body-building installations.



Bigger and durable aluminium alloy fuel tank with lockable cap.



Hendrickson  
Rear lift axle.



New digital meter with enhanced visibility on important information.


## FOR SAFETY, COST-SAVINGS AND THE ENVIRONMENT



For truly global design, Isuzu creates products on the basis of strong conviction in its mission.

Commercial vehicles and diesel engines must meet common global standards of performance and quality. For example, state-of-the-art environmental performance brings real benefits only when taken beyond national borders and is not limited to Japan. For this reason, Isuzu has shifted its development focus from the domestic market to the idea of global design. Environmental regulations in individual countries are no longer a factor as Isuzu develops diesel engines meeting future regulations of all markets worldwide and creates unique global strategy vehicles in the heavy-, medium- and light-duty segments as well as pickup trucks. "Gaining the trust of people everywhere" is the development philosophy. This, in turn, is supported by the base concept of "SEE Technology," or the idea of pursuing technological excellence in the three critical areas of Safety, Economy and Environment.

Disclaimer :  
Isuzu Malaysia Sdn. Bhd. reserves the right to change technical specifications and features without prior notice.

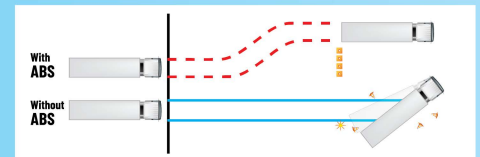

Anti-Lock Braking System (ABS).



**B20**  
DIESEL COMPATIBLE

Save environment and cost with "S-Cam" auto adjuster full air brakes.

Dealer's information

**ISUZU**  
GENUINE PARTS

**ISUZU**  
BEST VALUE PARTS